


DIGGER DERRICK

Terex® Telelect Digger Derricks are known throughout the industry. They come with a long history featuring quality and innovative design.

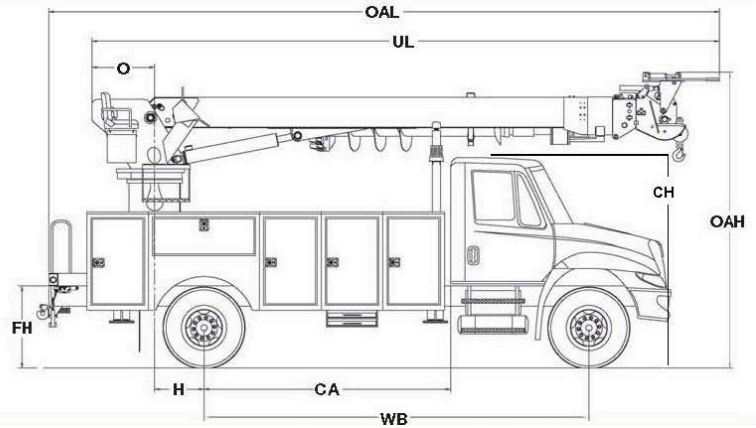


| Measurements | Commander 5045 | Commander 5048 | Commander 5050 | Commander 5052 | Commander 5055 |
|------------------------------------|---|---|---|---|---|
| <i>(Minimum Recommendations)</i> | ORA / BC / CMT | ORA / BC / CMT | ORA / BC / CMT | ORA / BC / CMT | ORA / BC / CMT |
| Typical Frame Height (FH) | 40 in. (101.6 cm) | 40 in. (101.6 cm) | 40 in. (101.6 cm) | 40 in. (101.6 cm) | 40 in. (101.6 cm) |
| Typical Cab Height (CH) | 112 in. (284.5 cm) | 112 in. (284.5 cm) | 112 in. (284.5 cm) | 112 in. (284.5 cm) | 112 in. (284.5 cm) |
| Offset (O) | 30.5 in. (77.5 cm) | 30.5 in. (77.5 cm) | 30.5 in. (77.5 cm) | 30.5 in. (77.5 cm) | 30.5 in. (77.5 cm) |
| Overall Height (OAH) | 12' 0" 12' 0" 11' 2" (3.7 m) (3.7 m) (3.4 m) | 12' 0" 12' 0" 11' 2" (3.7 m) (3.7 m) (3.4 m) | 12' 0" 12' 0" 11' 2" (3.7 m) (3.7 m) (3.4 m) | 12' 0" 12' 0" 11' 2" (3.7 m) (3.7 m) (3.4 m) | 12' 0" 12' 0" 11' 2" (3.7 m) (3.7 m) (3.4 m) |
| Overall Length (OAL) | 24' 8" 32' 4" 23' 4" (7.5 m) (9.8 m) (7.1 m) | 26' 8" 34' 4" 25' 4" (8.1 m) (10.5 m) (7.7 m) | 26' 8" 34' 4" 25' 4" (8.1 m) (10.5 m) (7.7 m) | 26' 8" 34' 4" 25' 4" (8.1 m) (10.5 m) (7.7 m) | 29' 8" 37' 4" 28' 4" (9.0 m) (11.4 m) (8.6 m) |
| Unit Length (UL) | 23' 6" (7.2 m) | 25' 6" (7.8 m) | 25' 6" (7.8 m) | 25' 6" (7.8 m) | 28' 6" (8.7 m) |
| Center of Rotation (H) | 24" 111.5" 61" (61 cm) (283.2 cm) (155 cm) | 24" 111.5" 61" (61 cm) (283.2 cm) (155 cm) | 24" 111.5" 61" (61 cm) (283.2 cm) (155 cm) | 24" 111.5" 61" (61 cm) (283.2 cm) (155 cm) | 24" 111.5" 61" (61 cm) (283.2 cm) (155 cm) |
| Cab to Axle (CA) | 120" 138" 102" (304.8 cm) (350 cm) (259 cm) | 120" 138" 102" (304.8 cm) (350 cm) (259 cm) | 120" 138" 102" (304.8 cm) (350 cm) (259 cm) | 120" 138" 102" (304.8 cm) (350 cm) (259 cm) | 120" 150" 102" (304.8 cm) (381 cm) (259 cm) |
| Wheel Base (WB) | 192" 210" 174" (487.7 cm) (533.4 cm) (442 cm) | 192" 210" 174" (487.7 cm) (533.4 cm) (442 cm) | 192" 210" 174" (487.7 cm) (533.4 cm) (442 cm) | 192" 210" 174" (487.7 cm) (533.4 cm) (442 cm) | 192" 222" 174" (487.7 cm) (563.9 cm) (442 cm) |
| Front Axle (FA) | 12,000 lb. (5,443 kg) | 12,000 lb. (5,443 kg) | 12,000 lb. (5,443 kg) | 12,000 lb. (5,443 kg) | 12,000 lb. (5,443 kg) |
| Rear Axle (RA) | 21,000 lb. 21,000 lb. 34,000 lb. (9,525 kg) (9,525 kg) (15,422 kg) | 21,000 lb. 21,000 lb. 34,000 lb. (9,525 kg) (9,525 kg) (15,422 kg) | 21,000 lb. 21,000 lb. 34,000 lb. (9,525 kg) (9,525 kg) (15,422 kg) | 21,000 lb. 21,000 lb. 34,000 lb. (9,525 kg) (9,525 kg) (15,422 kg) | 21,000 lb. 21,000 lb. 34,000 lb. (9,525 kg) (9,525 kg) (15,422 kg) |
| Gross Vehicle Weight Rating (GVWR) | 33,000 lb. 33,000 lb. 46,000 lb. (14,969 kg) (14,969 kg) (20,865 kg) | 33,000 lb. 33,000 lb. 46,000 lb. (14,969 kg) (14,969 kg) (20,865 kg) | 33,000 lb. 33,000 lb. 46,000 lb. (14,969 kg) (14,969 kg) (20,865 kg) | 33,000 lb. 33,000 lb. 46,000 lb. (14,969 kg) (14,969 kg) (20,865 kg) | 33,000 lb. 33,000 lb. 46,000 lb. (14,969 kg) (14,969 kg) (20,865 kg) |
| Recommended Weight for Stability | 25,000 lb. (11,340 kg) | 25,000 lb. (11,340 kg) | 25,000 lb. (11,340 kg) | 25,500 lb. (11,567 kg) | 25,500 lb. (11,567 kg) |
| Frame Section Modulus | 18.0 in ³ | 18.0 in ³ | 18.0 in ³ | 18.0 in ³ | 18.0 in ³ |
| Frame Yield Strength | 50,000 psi | 50,000 psi | 50,000 psi | 50,000 psi | 50,000 psi |
| Frame RBM | 900,000 in-lbs | 900,000 in-lbs | 900,000 in-lbs | 900,000 in-lbs | 900,000 in-lbs |

COMMANDER 5000 SERIES

STANDARD EQUIPMENT

- 100 Degrees of Boom Travel (+80 to -20)
- Dual Lift Cylinders
- Self-Aligning Swivel Ball Bushings
- Rectangular, Bi-Axial Epoxy Resin, Filament Wound Fiberglass Booms
- Box Fabricated Steel Lower Boom and Intermediate
- Hydraulic Boom Extension Intermediate & Upper
- Full Pressure Hydraulic Controls
- Full Pressure, Open-Center Hydraulic System
- 50 Gallon Hydraulic Oil Reservoir
- Custom Made Zoned Load Chart
- Continuous Unrestricted Rotation
- 15,000 lb. Turntable Winch
- Meets or Exceeds ANSI A10.31
- Planetary Parking Brake Rotation
- Right-Hand Command Post Controls
- Engine Stop/Start at Lower Controls
- Boom Angle Indicator
- Outrigger Interlock
- Moving Outrigger Alarm
- Truck Level Indicator

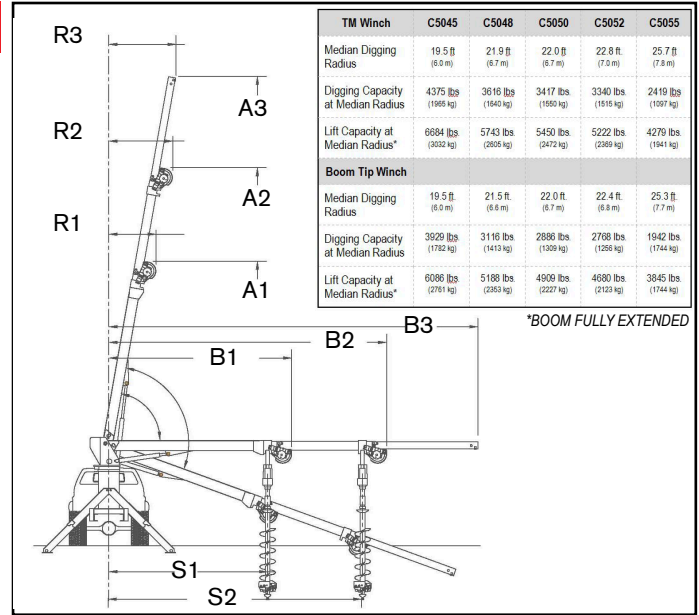

CAPACITIES & DIMENSIONAL DATA (Based on a 40 inch Frame Height)

| Model | Maximum Capacity | Capacity @ 10 ft. Radius | Load Radius | | | Sheave Height | | | Horizontal Reach | | | Digging Radius | |
|------------------------------|---------------------------|--------------------------|--------------------|--------------------|--------------------|---------------------|---------------------|---------------------|--------------------|---------------------|---------------------|---------------------|--------------------|
| | | | R1 | R2 | R3 | A1 | A2 | A3 | B1 | B2 | B3 | S1 | S2 |
| CMDR 5045 TM Winch | 30,000 lb (13,608 kg) | 16,050 lb (7,295 kg) | 3.1 ft (0.9 m) | 4.6 ft (1.4 m) | 6.1 ft (1.86 m) | 28.9 ft (8.81 m) | 37.2 ft (11.3 m) | 45.6 ft (13.9 m) | 19.1 ft (5.8 m) | 27.6 ft (8.4 m) | 36.1 ft (11.0 m) | 16.1 ft (4.91 m) | 24.6 ft (7.5 m) |
| Boom Tip PG Winch | 30,000 lb (13,608 kg) | 14,600 lb (6,620 kg) | 3.7 ft (1.13 m) | 5.1 ft (1.55 m) | 6.0 ft (1.83 m) | 27.9 ft (8.5 m) | 36.2 ft (11.0 m) | 45.0 ft (13.7 m) | 18.2 ft (5.6 m) | 26.7 ft (8.1 m) | 35.5 ft (10.8 m) | 16.1 ft (4.91 m) | 24.6 ft (7.5 m) |
| CMDR 5048 TM Winch | 30,000 lb (13,608 kg) | 15,350 lb (6,963 kg) | 3.4 ft (1.0 m) | 5.0 ft (1.5 m) | 6.6 ft (2.0 m) | 30.8 ft (9.4 m) | 39.7 ft (12.1 m) | 48.6 ft (14.8 m) | 21.1 ft (6.4 m) | 30.1 ft (9.2 m) | 39.1 ft (11.9 m) | 18.1 ft (5.5 m) | 27.1 ft (8.2 m) |
| Boom Tip PG Winch | 27,860 lb (12,637 kg) | 13,700 lb (6,214 kg) | 4.0 ft (1.2 m) | 5.6 ft (1.7 m) | 6.5 ft (2.0 m) | 29.9 ft (9.1 m) | 38.7 ft (11.8 m) | 48.0 ft (14.6 m) | 20.2 ft (6.2 m) | 29.2 ft (8.9 m) | 38.5 ft (11.7 m) | 18.1 ft (5.5 m) | 27.1 ft (8.2 m) |
| CMDR 5050 TM Winch | 30,000 lb (13,608 kg) | 15,300 lb (6,940 kg) | 3.4 ft (1.0 m) | 5.2 ft (1.6 m) | 7.0 ft (2.1 m) | 30.8 ft (9.4 m) | 40.7 ft (12.4 m) | 50.0 ft (15.4 m) | 21.1 ft (6.4 m) | 31.1 ft (9.5 m) | 41.1 ft (12.5 m) | 18.1 ft (5.5 m) | 28.1 ft (8.5 m) |
| Boom Tip PG Winch | 27,820 lb (132,619 kg) | 13,650 lb (6,192 kg) | 4.0 ft (1.2 m) | 5.7 ft (1.7 m) | 6.9 ft (2.1 m) | 29.9 ft (9.1 m) | 39.7 ft (12.1 m) | 49.9 ft (15.2 m) | 20.2 ft (6.2 m) | 30.2 ft (9.2 m) | 40.5 ft (12.3 m) | 18.1 ft (5.5 m) | 28.1 ft (8.5 m) |
| CMDR 5052 TM Winch | 30,000 lb (13,608 kg) | 15,260 lb (6,922 kg) | 3.4 ft (1.0 m) | 5.3 ft (1.6 m) | 7.3 ft (2.2 m) | 30.8 ft (9.4 m) | 41.7 ft (12.7 m) | 52.5 ft (16.0 m) | 21.1 ft (6.4 m) | 32.1 ft (9.8 m) | 43.1 ft (13.1 m) | 18.1 ft (5.5 m) | 29.1 ft (8.8 m) |
| Boom Tip PG Winch | 27,790 lb (12,606 kg) | 13,600 lb (6,169 kg) | 4.0 ft (1.2 m) | 5.9 ft (1.8 m) | 7.2 ft (2.2 m) | 29.9 ft (9.1 m) | 40.7 ft (12.4 m) | 51.9 ft (15.8 m) | 20.2 ft (6.2 m) | 31.2 ft (9.5 m) | 42.5 ft (13.0 m) | 18.1 ft (5.5 m) | 29.1 ft (8.8 m) |
| CMDR 5055 TM Winch | 30,000 lb (13,608 kg) | 14,400 lb (6,532 kg) | 3.9 ft (1.2 m) | 5.9 ft (1.8 m) | 7.9 ft (2.4 m) | 33.8 ft (10.3 m) | 44.6 ft (13.6 m) | 55.5 ft (16.9 m) | 24.1 ft (7.3 m) | 35.1 ft (10.7 m) | 46.1 ft (14.1 m) | 21.1 ft (6.4 m) | 32.1 ft (9.8 m) |
| Boom Tip PG Winch | 24,300 lb (11,022 kg) | 12,850 lb (5,829 kg) | 4.5 ft (1.4 m) | 6.4 ft (2.0 m) | 7.8 ft (2.4 m) | 32.8 ft (10.0 m) | 43.6 ft (13.3 m) | 54.9 ft (16.7 m) | 23.2 ft (7.1 m) | 34.2 ft (10.4 m) | 45.5 ft (13.9 m) | 21.1 ft (6.4 m) | 32.1 ft (9.8 m) |

OPTIONAL EQUIPMENT

- Various Digger / Augers
 - Auger Storage Left Side (Typical)
 - Auger Storage Right Side (Subject to Configuration)
- Fiberglass Personnel Platform
 - Liners with or Without Steps
- Various Types of Controls
 - Handle Rack Controls
 - Radio Remote Controls
 - Full Pressure Upper Controls
 - Single Stick "T" Controls
- Engine Stop/Start and Throttle Advance at Top Controls
- Engine Stop/Start at Lower Controls
- Various Types of Throttle Advance at Lower Controls
- Hydraulic Overload Protection (HOP)
- Boom Tip Winch
- Material Handling Jibs
- Transferable Pole Flanges
- Various Sizes of Pole Guides
- Pole Guide Interlock
- Planetary Slip Brake Rotation
- Hydraulic Tool Outlets
- Pole Puller
- Multi-Part Line Components
- Corner Mount Derricks
- Boom Storage Warning Light
- Outrigger Sag Light
- Various Types of Outriggers
- Truck Grounding Cable & Clamp

Effective Date: July 2019 Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Terex makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation and/or its subsidiaries in the USA and other countries. All rights are reserved. Terex® is a registered trademark of Terex Corporation in the USA and many other countries. Copyright 2019 Terex Corporation.